




Ideal Standard

Basin Mixer

Ceraplus

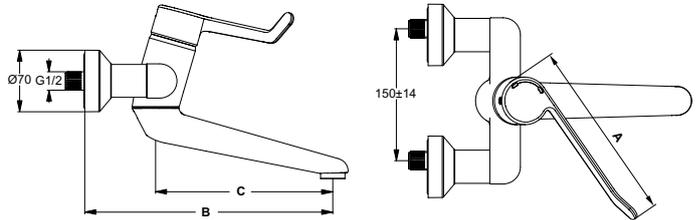

		A	B	C
B8222	On-Off S-connectors with noise reducers	180	230	150
B8314	Standard S-connectors with noise reducers	180	208	150
B8223	On-Off S-connectors with noise reducers	230	230	150
B8315	Standard S-connectors with noise reducers	230	208	150
B8224	On-Off S-connectors with noise reducers	180	280	200
B8316	Standard S-connectors with noise reducers	180	258	200
B8225	On-Off S-connectors with noise reducers	230	280	200
B8317	Standard S-connectors with noise reducers	230	258	200
B8226	On-Off S-connectors with noise reducers	230	330	250
B8318	Standard S-connectors with noise reducers	230	308	250

Article-No.: B8315AA

Sequential mixer, 230 mm lever & 150 mm spout

Ceraplus exposed sequential basin mixer with 230 mm lever and 150 mm spout, standard S-connectors with noise reducers. With Aerator – Anti-vandal M24x1-A (big profile), Laminar stream, Cartridge Ø47 mm Cycle Valve with Hot Water Stop installed (Cartridge with Hot Water Stop – to endure torque of min 30 Nm), Sealed escutcheons and Covered nuts. Spout fixation options for: middle position fixation, limited rotation or non-limited rotation.

Colour: AA - Chrome

More product details:

Type: Sequential
 Mounting: Exposed
 Operation Type: Single lever
 Style: Contemporary
 Flow Rate (litre): 20
 Net Weight (kg): 2,74
 Material: Chrome plated